

LEXUS NAVIGATION TOUCH SCREEN REMOVAL

Required Tools:

- plastic trim pry tools
- phillips screwdriver

***** DISCONNECT THE NEGATIVE SIDE OF THE BATTERY BEFORE STARTING. *****

- 1. Use a pry tool to remove the left and right vents to either side of the NAV unit. It may be easiest to pry from the top to clear the first clip and then just pull each vent out with your fingers. Be careful not to indent the dash foam at the top by prying against it too hard.**




2. Now that the vent is removed unplug the connector near the bottom and place the entire assembly aside. Repeat on the other side.




3. Once the vents are removed you have access to the four screws holding the main NAV/Radio/Climate unit in place. There are two phillips screws/bolts on the left and two on the right.



4. Once the four screws have been removed you're ready to pull the unit out as one piece. The first step is to pull away at the top of the unit and slide it out, exposing the 3 alignment slots. there is a small overlap so you may have to GENTLY pry the dash lip up with your fingers.

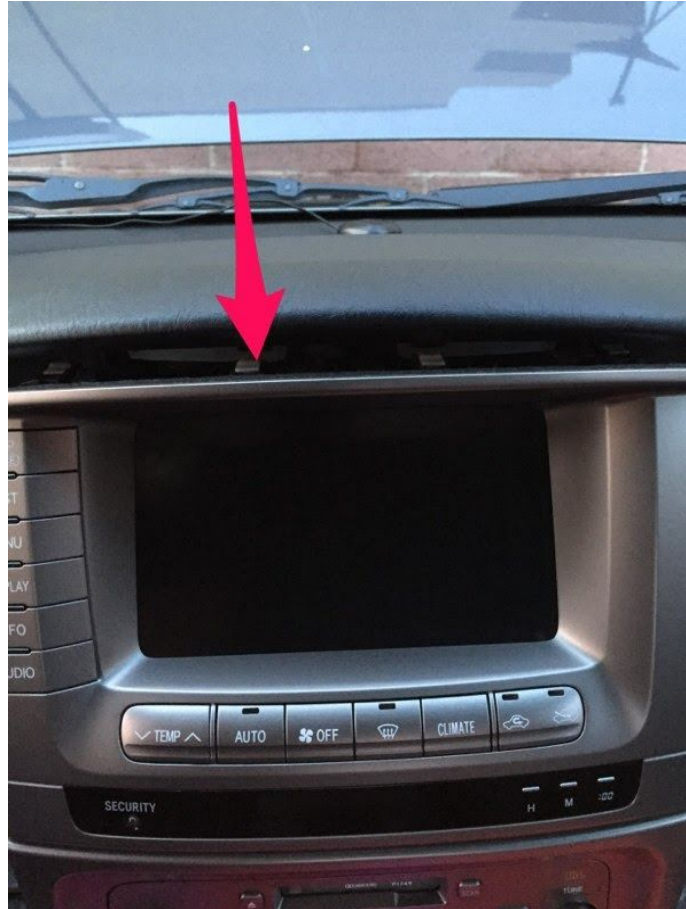

5. Now you can pull near the bottom and pull out the lower alignment slots and then slowly slide the entire unit out taking care not to stress the wiring in the rear. Now remove the wiring harness connectors from the back of the unit.

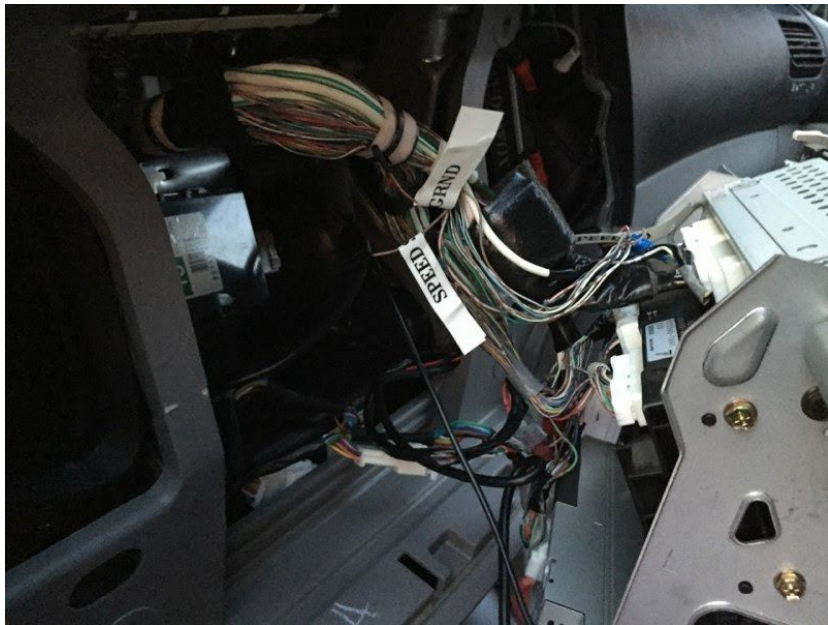

Once the navigation unit has been removed from the vehicle, please detach the brackets and stereo unit before sending it to us.