



RANGE ROVER P38 CLIMATE CONTROL MODULE REMOVAL INSTRUCTIONS

Open the centre console lid and remove the two fixing screws that retain the electric window switch pack in the centre console cubby box. These are located on the top front edge of the cubby box. The pack is retained by two flat spring steel tabs at the bottom. You can tilt it forward and pull it upwards to disengage them. To remove the pack completely, you would need to remove the handbrake grip, but this is not necessary to move the pack out of the way enough to get at the fixings for the gear selector surround.

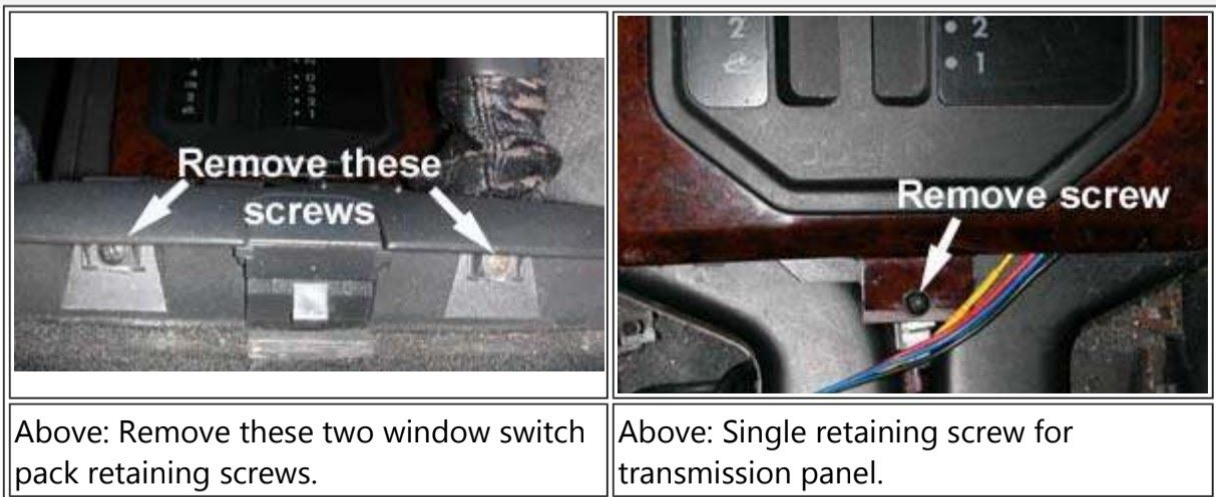

Now remove the single screw that holds down the rear edge of the gear selector surround. Lift the panel out - it is only retained by simple spring clips at the front - and unplug the cigarette lighter socket and the lamp and holder. You might want to replace this bulb whilst you have it apart - it is a standard 1.2 watt 12 volt wedge base bulb as used in the HEVAC and instrument panel. You can now, with your fingers or a screwdriver, pry the rear edge of the finishing panel up and sideways to get it over the retaining lip. See photos below. This will then allow you to slide the panel back and release the sprag clip from the switch pack panel. The intermediate photos (below) of the retaining lip were taken after removal of the side panel in order to illustrate this article.

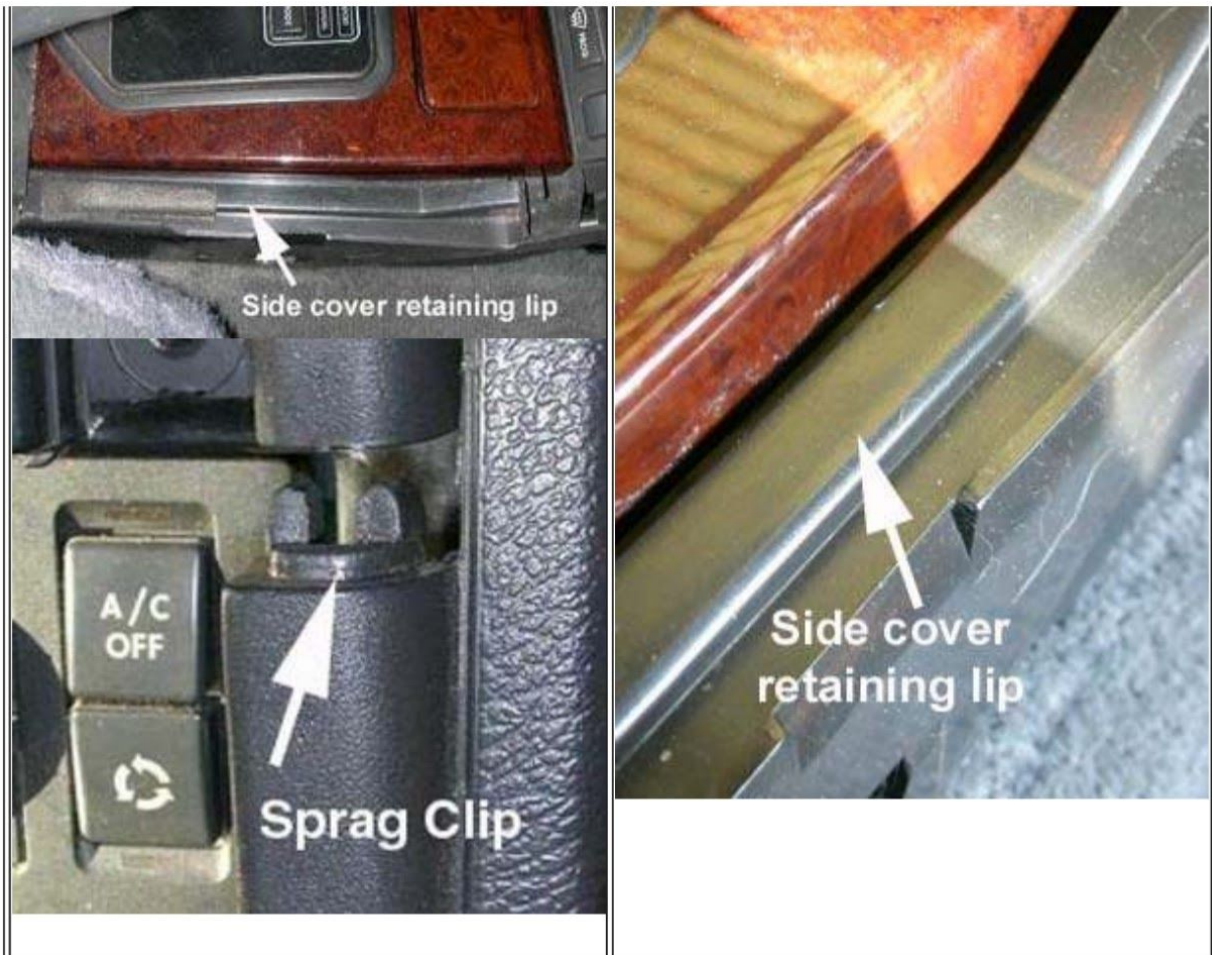

You will now have access to the screws securing the climate control module in place. Remove the screws, slide out the climate control, and unplug the wiring harness connector.